

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000307

International filing date: 28 January 2005 (28.01.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0402041.8
Filing date: 30 January 2004 (30.01.2004)

Date of receipt at the International Bureau: 17 March 2005 (17.03.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



PCT/GB 2005 / 0 00 3 0 7



INVESTOR IN PEOPLE


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


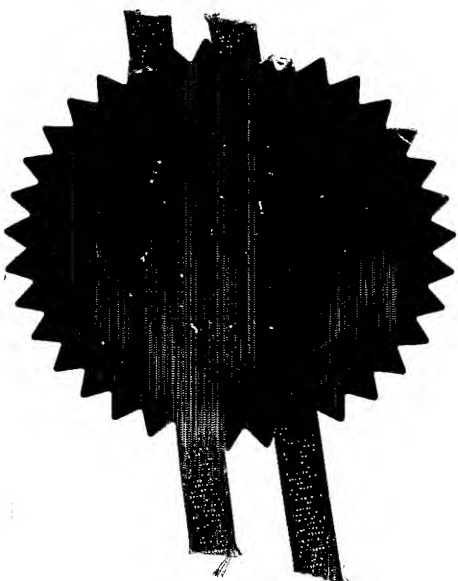


Signed

Stephen Hordley

Dated

14 February 2005

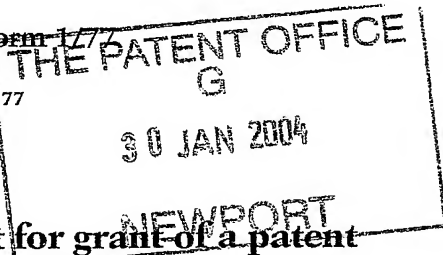

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

MRH/P104500GB

2. Patent application number

(The Patent Office will fill this part in)

0402041.8

30 JAN 2004

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Farmer Controls Plc
Envirovent House
Hornbeam Business Park
HARROGATE
HG2 8PA
UK

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

8799579001

4. Title of the invention

ELECTRIC FAN

5. Name of your agent (if you have one)

Harrison Goddard Foote

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Belgrave Hall
Belgrave Street
Leeds
LS2 8DD

Patents ADP number (if you know it)

7631310002

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f)

Number of earlier UK application

Date of filing
(day / month / year)

8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request?

Answer YES if:

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- Otherwise answer NO (See note d)

Patents Form 1/77

9. Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form

Description 6

Claim(s)

Abstract

Drawing(s) 14

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for a preliminary examination and search (Patents Form 9/77)

Request for a substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

Harmon Goddard Rote

29-01-04
Date

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom Michael Harrison

0113 233 0100

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

ELECTRIC FAN

Field of the Invention

This invention relates to electric fans or blowers which may be used in, for instance, domestic, medical, commercial, industrial and transport applications.

5

Reference will be made hereinbelow to ventilating fans for causing air to be expelled from a space, for instance, from a kitchen. Such fans may be wall, window or duct mounted so that the air is expelled from the kitchen or other space to the exterior of the building. However, it should be appreciated that the present invention may be embodied in all sorts of different pressure and suction fans and blowers and, more generally, to fluid moving devices in which the fluid is a gas or a liquid.

10

Background to the Invention

Ventilating fans are known which may be of the centrifugal or axial variety. In general, they are rather inefficient devices and there is a need for a ventilating fan which can effectively shift large volumes of air with low electric power requirements. Existing fans have components such as a motor, electronics and connectors, that, because they are positioned in the path of air passing through the fan, are vulnerable to dust, grease and other contaminants. These contaminants cause reduction in life expectancy of the components and make them difficult to clean.

20

An attempt to deal with these problems involves the provision of some form of device to pre-filter the air and such a device adds to the cost of the fan and itself has maintenance requirements.

25

Accordingly, there is a need for a ventilating fan which can be easily disassembled, at least to the extent that its front cover may be removed to allow the consequential easy removal of the various moving parts, for instance, the impeller. Once these moving parts are removed, smooth, rounded internal surfaces are more easily cleaned.

30

Statements of the Invention

According to the present invention there is provided an electric fan comprising a housing having a fluid inlet and a fluid outlet, a motor mounted within the housing for rotation about an axis extending between the inlet and the outlet, an impeller
5 mounted within the housing for rotation by the motor so as to draw fluid into the housing via the inlet along said axis and to direct fluid radially, relative to said axis, within the housing, and means to collect said radially directed fluid and direct it towards said outlet, the collecting means being a plurality of collection chambers.

10 Preferably the collection chambers are circumferentially spaced about said axis. Preferably, the collecting means is a plurality of helical conduits, each having a circumferentially disposed inlet and axially disposed outlet.

The provision of multiple collecting chambers to receive air from a rotating impeller
15 allows significant reductions in space for a given performance, and without reduction in efficiency, compared with a conventional fan.

The present invention also provides an electric fan comprising a housing having a fluid inlet and a fluid outlet, a motor mounted within the housing for rotation about
20 an axis extending between the inlet and the outlet, an impeller mounted within the housing for rotation by the motor so as to draw fluid into the housing via the inlet along said axis and to direct the fluid radially, relative to said axis, within the housing, and means to collect said radially directed and to direct it towards said
25 outlet, the housing being provided with a front cover defining the fluid inlet, removal of the front cover allowing access to said impeller, the impeller being then removable from the housing by relative movement along said axis.

This aspect of the present invention accordingly allows for simple removal of the front cover and impeller for cleaning, repair or other purposes. The detached
30 components may, for instance, be simply cleaned by immersion in an appropriate cleaning liquid. Any items exposed within the fan by the removal of the detachable

items are preferably such that plain surfaces are exposed allowing easy cleaning with, for instance, a damp cloth.

5 Furthermore other components, such as the motor, the drive and the controls, are preferably sealed from dust and water spray, which makes them not only easy to clean but also both hygienic and safe. More preferably the arrangement is such that removal of the cover effects isolation of the motor, so that it is not possible to run the electric fan in an unguarded state.

10 Accordingly, a fan of the present invention may have all those components which are vulnerable to contamination by dust, grease and other contaminants, encased in protective chambers, thereby avoiding the problems mentioned above in connection with existing electric fans. Cleaning is fundamentally easier and quicker and life expectancy is extended. Furthermore, the requirement for a device to pre-filter the
15 air is eliminated.

Brief description of the Drawings

The invention is illustrated, by way of example only, by the embodiments shown in the accompanying drawings, in which:

20

Figure 1 is a front view of an electric fan in accordance with the present invention;

Figure 2 is a side view of the electric fan of Figure 1;

Figure 3 is a section on line AA of Figure 1;

25

Figure 4 is a section on line BB of Figure 1;

Figure 5 is a rear view of the fan of Figure 1; and

Figure 6 is an exploded perspective view of the fan of Figure 1.

Detailed description of the Invention

30 The invention will now be described, by way of example, with reference to the accompanying drawings.

An electric fan 1 is broadly rectangular when viewed from the front or the rear as shown in Figures 1 and 5. From the side it is again generally rectangular although with a somewhat protruding front face 3 and a rear extension 5 provided by a duct adaptor 7.

The main components of fan 1 are perhaps best illustrated in the exploded view of Figure 6, these components being front cover 9, impeller 11, hub 13, motor mount 15, motor 17, air collector 19, housing body 21 and the above mentioned duct adaptor 7. These components are all connected together essentially concentrically along an axis extending between the front cover 9 and the duct adaptor 7.

Front cover 9 includes a centrally disposed circular air inlet which itself has a central hub 25 surrounded by concentric rings 27, interlinked by generally radial webs 29.

Front cover 9 clips on to housing body 21 about their respective peripheral edges. Housing body 21 is in the form of a deep, generally rectangular wall 31 which is partly open at both ends, the front end being for securing to front cover 9 and the rear end for securing to duct adaptor 7. Within walls 31, air collector 19 is provided with a lead cover 5 which encloses the electric leads.

Together the front cover 9 and housing body 21 provide the overall housing for the electric fan 1. Within the housing the various components 11, 13, 15, 17 and 19 are located and extending rearwardly from the housing is the duct adaptor 7.

Considering the components within the housing from front to rear, impeller 11 has a central hub connector 33 which includes a fastening device for securing the impeller to adjacent hub 13. This fastening device (not shown) is released by gripping radially outwardly biased lugs 35 and pressing inwardly towards the centre of the hub connector 33.

Surrounding hub connector 33 are axially spaced apart forward and rearward rings 37 and 39. Between these rings extend peripherally spaced apart vanes 41, each vane being attached at each end to a respective ring 37, 39 and extending generally towards the centre of the impeller. Each vane 41 is broadly an elongate rectangle
5 being curved across its width.

Hub 13 is generally of truncated dome shape having a flattened forward end 43 from the middle of which projects a circular peg 45. On opposite sides of peg 45 are apertures 47 and these, together with peg 45, are for engagement with corresponding
10 elements (not shown) of the fastening device located within the central hub connector 33 of impeller 11.

The inner surface of rearward rim 49 and forward circular flange 51 of motor mount 15 form a labyrinth seal between the moving and stationary components of the fan.
15

Motor mount 15 is in the form of a cup within which is located the forward end of motor 17. Motor 17 is provided with a forwardly extending stub shaft 53 which extends through motor mount 15 to locate in the hollow peg 45 as best illustrated in Figure 4. When the motor is running, stub shaft 53 rotates and this in turn causes hub
20 3 and impeller 11 to rotate.

The rotation of impeller 11 causes air to be sucked into the housing of fan 1 through the inlet provided in front cover 9. Surrounding the above described components 11, 13, 15 and 17 is an inner housing in the form of an air collector 19. In this
25 embodiment, collector 19 comprises two radial and axial expansion (part helical collection) ducts 55 concluding at a peripherally located discharge 57. Passageways extend circumferentially and rearwardly from the front of collector 19 to its rear. This air collector 19 accordingly directs air thrown radially outwardly by impeller 11 in a direction towards the rear of the fan and into duct adaptor 7. In use duct adaptor
30 7 will extend through a window or wall to the exterior of the building or may itself be

fitted to a further conduit which extends to the exterior of the building. It may also be fitted in a duct in, for instance, a roof, ceiling or floor cavity.

5 The internal housing of the above described electric fan collects the air discharging from impeller 11 and, in so doing, causes the air to expand thereby converting part of the kinetic pressure head to a static head. The extent to which such a conversion occurs depends on the system to which the blower is subjected, the system being the arrangement located either before the inlet to the device, or after its outlet or a combination of both. The level and efficiency of this conversion directly contributes
10 to the capacity and overall efficiency of the fan as a whole.

Essentially the above described fan receives air travelling in the direction of the main axis of the device and, through the rotating part of the device, causes it to leave in a radial direction. The air leaves via a collecting chamber which modifies the static
15 and dynamic components of pressure and provides a discrete ducted direction to the air. The provision of multiple collecting chambers to receive air from a single rotating impeller, as provided by the above described fan, allows significant reductions in space for a given performance and without reduction in efficiency. In addition, with many smaller outlets from the multiple collecting chambers, changing
20 the direction of the air to the axial directions is achieved much more efficiently.

The location of the key moving and other parts of the above described fan around a single axis extending from the front to the rear of the device allows for the simple disassembly of at least some of these key components. This is particularly
25 advantageous in that it allows the fan to be very simply maintained, in particular with regard to removing grease, cleaning generally, washing and disinfecting.

P104500GB

